



Drone Connections

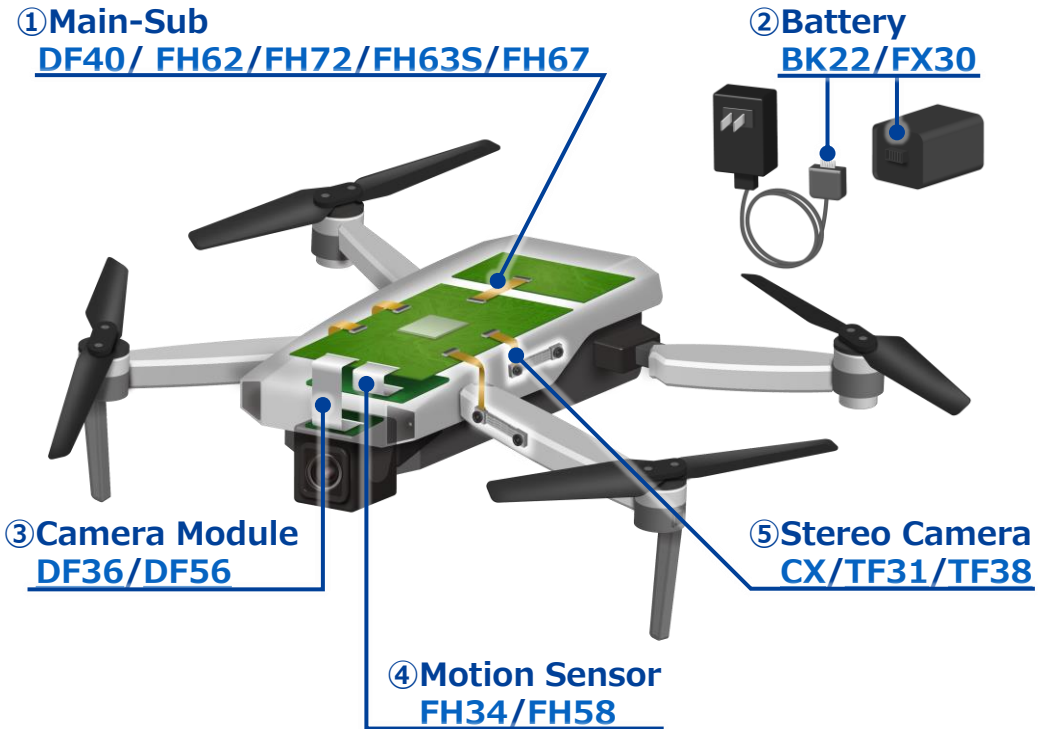

① Main-Sub

Board/FPC-to-Board
Stacking Height:
1.5-4.0mm



DF40 Series

One Action Lock
Pitch : 0.25/0.3mm



FH62/72 Series

One Action Lock
Pitch: 0.5mm



FH63S Series


One Action Lock, Vertical
Pitch: 0.5mm



FH67 Series

② Battery

FPC-to-Board
Pitch : 0.4mm



BK22 Series


Board-to-Board
25A Max.



FX30 Series

③ Camera Module

Micro Coaxial
Pitch : 0.4mm



DF36 Series

Micro Coaxial
Pitch : 0.3mm



DF56 Series

④ Motion Sensor

Back Flip
Pitch: 0.5mm



FH34 Series

Back Flip
Pitch: 0.2/0.25mm



FH58 Series


⑤ Stereo Camera

USB Type-C
Variation Available




CX Series

Standard ZIF
Pitch: 0.5/1.0mm




TF31 Series

Standard ZIF, Vertical
Pitch: 0.5mm



TF38 Series

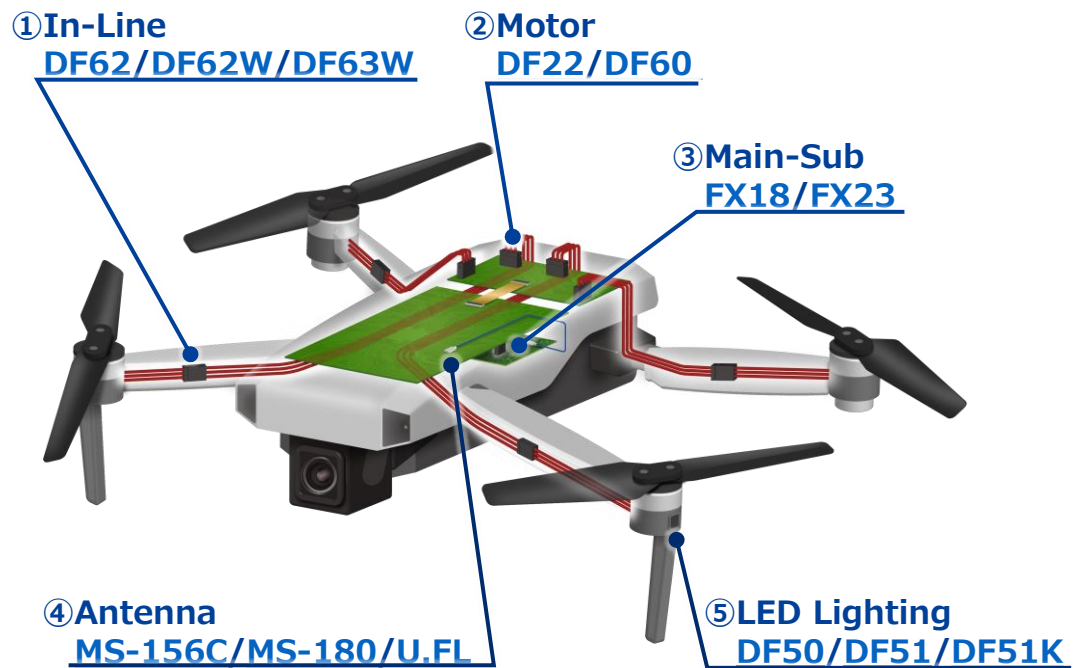

① In-Line

Slim In-Line
DIP



DF62 Series

Water Resistant
Slim In-Line



DF62W Series

IP67 Waterproof
Power Supply



DF63W Series

② Motor

Wire-to-Board
30A Max.



D22 Series


Wire-to-Board
65A Max.



DF60 Series

③ Main-Sub

Board-to-Board
Pitch : 0.8mm



FX18 Series


Board-to-Board
Pitch : 0.5mm



FX23 Series

④ Antenna

RF Switch
Height : 1.35mm
0 to 11GHz



MS-156 Series

RF Switch
Height : 0.85mm
0 to 11GHz



MS-180 Series

Standard RF
0 to 18GHz

FL CoaxBridge™



U.FL Series

⑤ LED Lighting

Positive Lock
Pitch : 1.0mm



DF50 Series

Side Lock
Pitch : 2.0mm



DF51 Series

Center Lock
Pitch : 2.0mm



DF51K Series